


Model:  
T1515

Dishwasher Hood Type  
600 x 500mm basket



### General Information

The Prodis T1515 600 x 500mm dishwasher with automatic rinseaid and detergent injectors, fixed wash and rinse thermostats, and a selectable 90,120 or 180 second cycles and a continuous wash option.

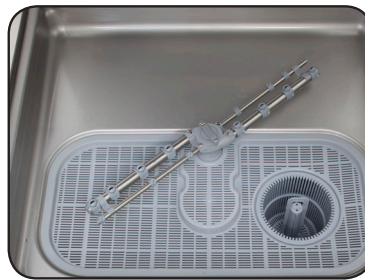

### Key Features

### Construction

### Available Options

- 600 x 500mm basket size
- Large 450mm internal clearance
- Single phase operation
- Auto start as standard
- 90, 120 or 180 second wash cycles
- Automatic rinseaid pump
- Automatic detergent pump
- Powerful 1500w wash pump
- Primary wash pump filter
- Secondary tank filters
- 30 litre wash tank capacity

- Stainless steel exterior
- Stainless steel interior

- Manual water softener
- Automatic water softener
- Drain pump
- WRAS approved air break tank
- Double skinned hood
- Rinse boost pump
- Heat recovery / steam condenser

## Technical Details

## T 1515



Dimensions (w,d,h mm)	788 x 835 x 2080mm
Internal Clearance / Maximum Load Height	465mm
Stainless Steel Support Rack	Hinged
Cycle Programs	60"/120"/180"
Auto Start	Yes
Continuous Wash	Yes
Timed Peristaltic Rinseaid Pump	Yes
Timed Peristaltic Detergent Pump	Yes
Wash Arms	Parallel Stainless Steel
Primary Wash Pump Filter	Yes
Secondary Tank Filters	Yes
Wash Tank Capacity	30 Litres
Rinse Tank Capacity	6 Litres
Wash Pump Power	1500w
Wash Tank Power	2500w
Rinse Tank Power	8000w
Total Power Consumption	9500w
Standard Power Supply	400V 3N+T 50hz
Alternative Power Supply	No

Control	Electronic
Tank / Boiler Temperature Display	Yes
ECO Mode	Yes
Self Diagnostic Mode	Yes

## Options

Drain Pump	Optional
Air Break Tank	Optional
Built In Water Softener	Optional*
Double Skinned Hood	Optional
Heat Recovery System	Optional

\*Requires Air Break Tank

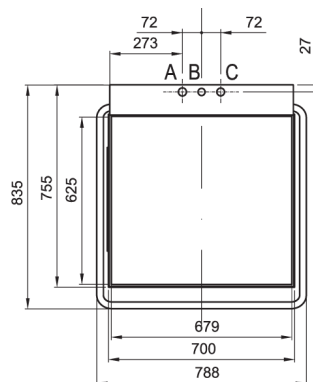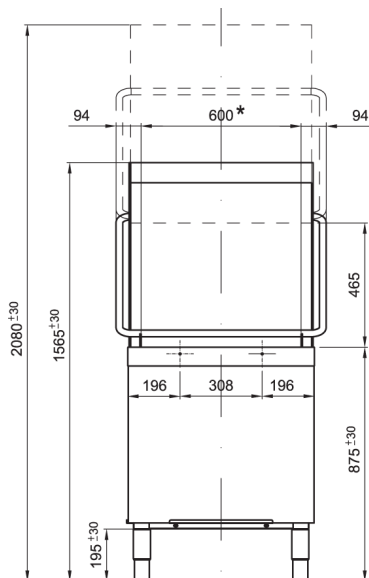

# Prodis

Approvals

Available At

Document #

